
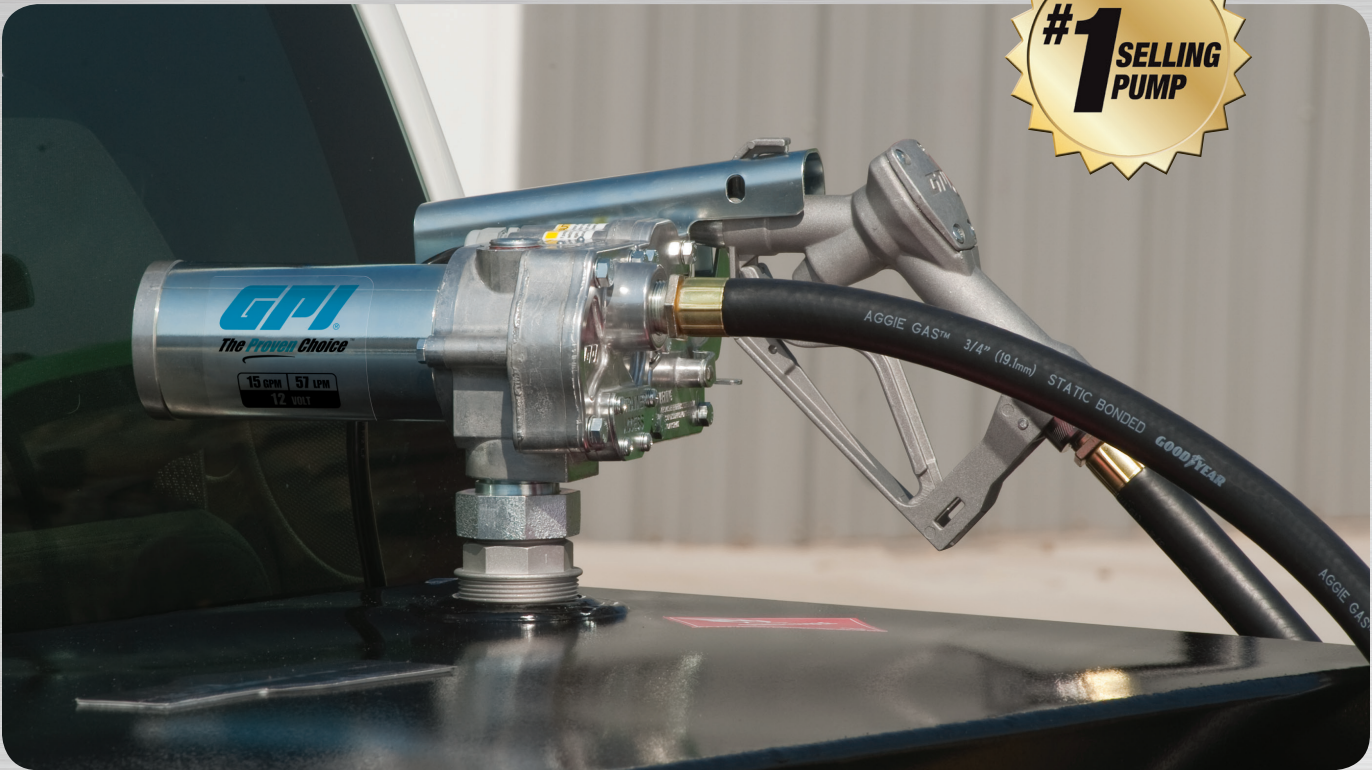



FUEL TRANSFER PUMPS

15 GPM
12 VOLT



M-150S

Designed for agriculture, automotive and construction applications

- 15 GPM flowrate, empties 100 gallon mobile tanks in approximately 7 minutes
- Models with spin collar design offer versatile mounting positions and include tank adapter for easy installation
- Extremely long life and trouble-free operation
- Cast aluminum construction
- Low profile design for increased visibility when used on mobile tanks in pickup trucks
- Circuit breaker motor protection
- Tank adapter included (spin collar model only)

M-150S SPECIFICATIONS

Flowrate (GPM / LPM)	15 / 57
Voltage	12-volt DC
Type	Rotary Gear
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) 12/2 AWG
Inlet / Outlet Size	1 in. / 3/4 in.
Dispensing Hose	12 ft. (3.7 m) x 3/4 in. OR 10 ft. (3 m) 3/4 in.
Suction Pipe	Telescoping to 40 in. OR Trim-to-Fit
Warranty	2 Year



M-150S-AU / M-150S-B100-AU




M-150S-MU / M-150S-B100-MU



FUEL TRANSFER PUMPS



15 GPM
12 VOLT

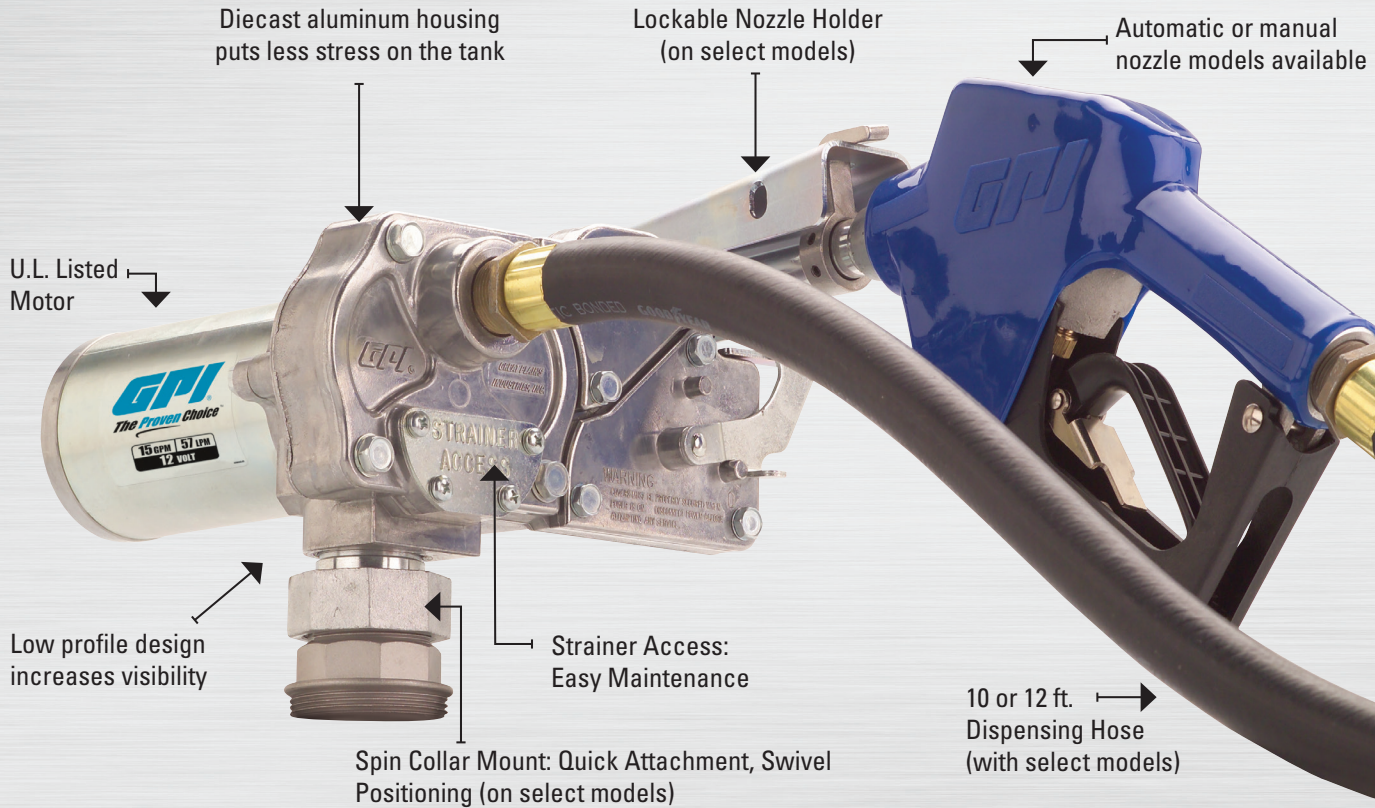

ORDERING INFORMATION

Model	Part No.	Nozzle	Nozzle Holder	Power Cord	Suction Pipe	Hose	Mount	Certifications
M-150S-AU	110000-100	Automatic	Lockable	18 ft.	Telescoping	12 ft.	Spin Collar	
M-150S-MU	110000-99	Manual	Lockable	18 ft.	Telescoping	12 ft.	Spin Collar	
M-150S-EM	110000-107	Manual	Standard	18 ft.	Trim-to-Fit	10 ft.	Direct Mount	
M-150S-PO	110000-103	None	Lockable	18 ft.	None	None	Spin Collar	
M-150S-E-PO-BYO	110240-02	None	Standard	None	None	None	Direct Mount	
M-150S-B100-AU	110000-127	Automatic	Lockable	18 ft.	Telescoping	12 ft.	Spin Collar	
M-150S-B100-MU	110000-126	Manual	Lockable	18 ft.	Telescoping	12 ft.	Spin Collar	

M-150S-EM



M-150S-PO



M-150S-E-PO-BYO

