

# ENGINEERED TO DELIVER

Extended Duty Cycles



**35 GPM**  
**115/230**  
VOLT

## PRO35-115

Engineered for high performance and longevity, the PRO35 gets the job done fast and efficiently.

- Extended Duty Cycle exceeds the industry standard
- Weight centering inlet base includes pressure relief and easy strainer access
- Field replaceable switch and vanes
- Tank Adapter included
- Thermally protected motor
- Vacuum Breaker Ready
- Extreme Temperature Series (XTS) models available

FOR USE WITH gasoline, diesel fuel and kerosene.  
Refer to Owner's Manual for full list of fuels




### PRO35-115 SPECIFICATIONS

Flowrate (GPM / LPM)	35 / 132
Voltage	115- or 230-volt AC
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 1/4 in. Inlet / 1 in. Outlet
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

**35 GPM**  
**115/230**  
**VOLT**

**4** YEAR  
**PUMP**  
**WARRANTY**

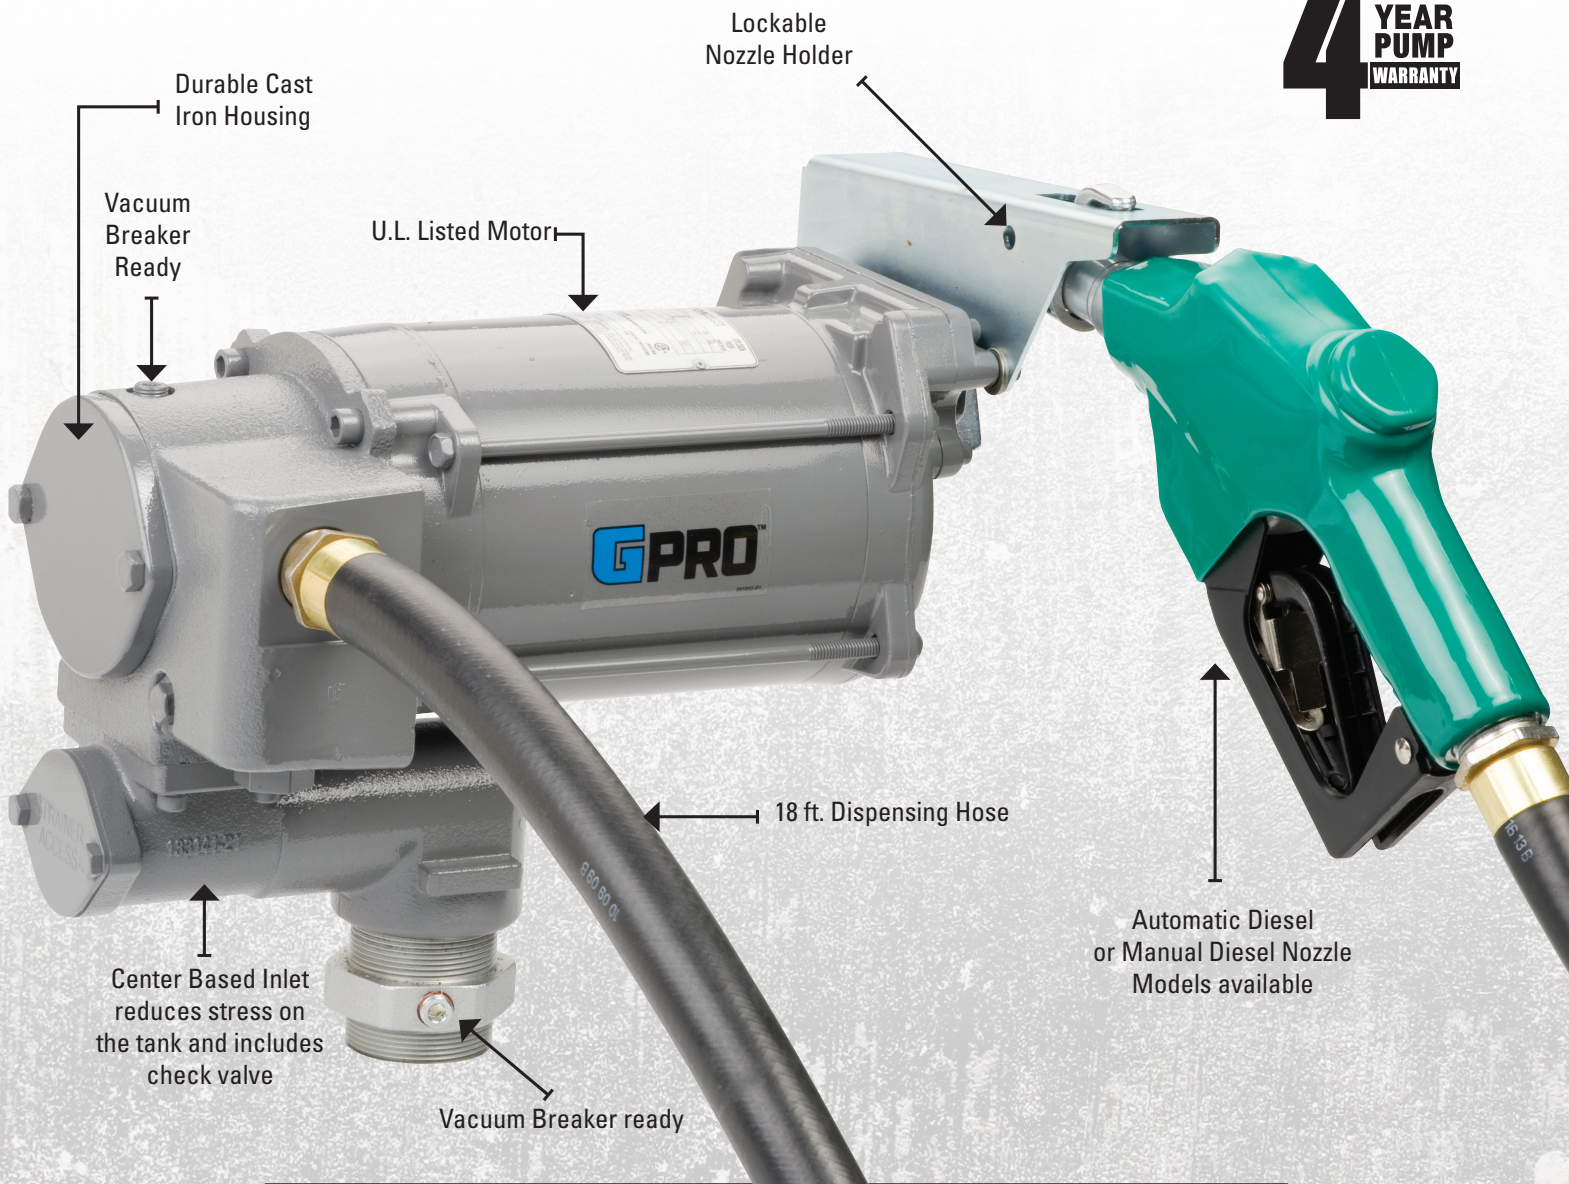

ORDERING INFORMATION				
Model	Part No.	Nozzle	Hose	Temperature Rating
PRO35-115AD	504000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO35-115MD	504000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO35-115RD	504000-04	None	None	-20° F / -29° C
PRO35-115PO	504000-01	None	None	-20° F / -29° C
PRO35-115AD/XTS	504000-06	Automatic Diesel	18 ft.	Tested to -40° F / -40° C
PRO35-115PO/XTS	504000-05	None	None	Tested to -40° F / -40° C