

ENGINEERED TO DELIVER

4 Year Warranty

20 GPM
115 VOLT

PRO20-115

Impressive 20 GPM flowrate for stationary tank applications. Ideal for fleet, agriculture or industrial applications.

- Extended Duty Cycle exceeds the industry standard
- Weight centering inlet base includes pressure relief and easy strainer access
- Field replaceable switch and vanes
- Tank Adapter included
- Thermally protected motor
- Vacuum Breaker Ready
- Extreme Temperature Series (XTS) models available

FOR USE WITH gasoline, diesel fuel and kerosene.
Refer to Owner's Manual for full list of fuels




PRO20-115 SPECIFICATIONS

Flowrate (GPM / LPM)	20 / 76
Voltage	115-volt AC
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 in. / 1 in.
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

20 GPM
115 VOLT

4 YEAR
PUMP
WARRANTY

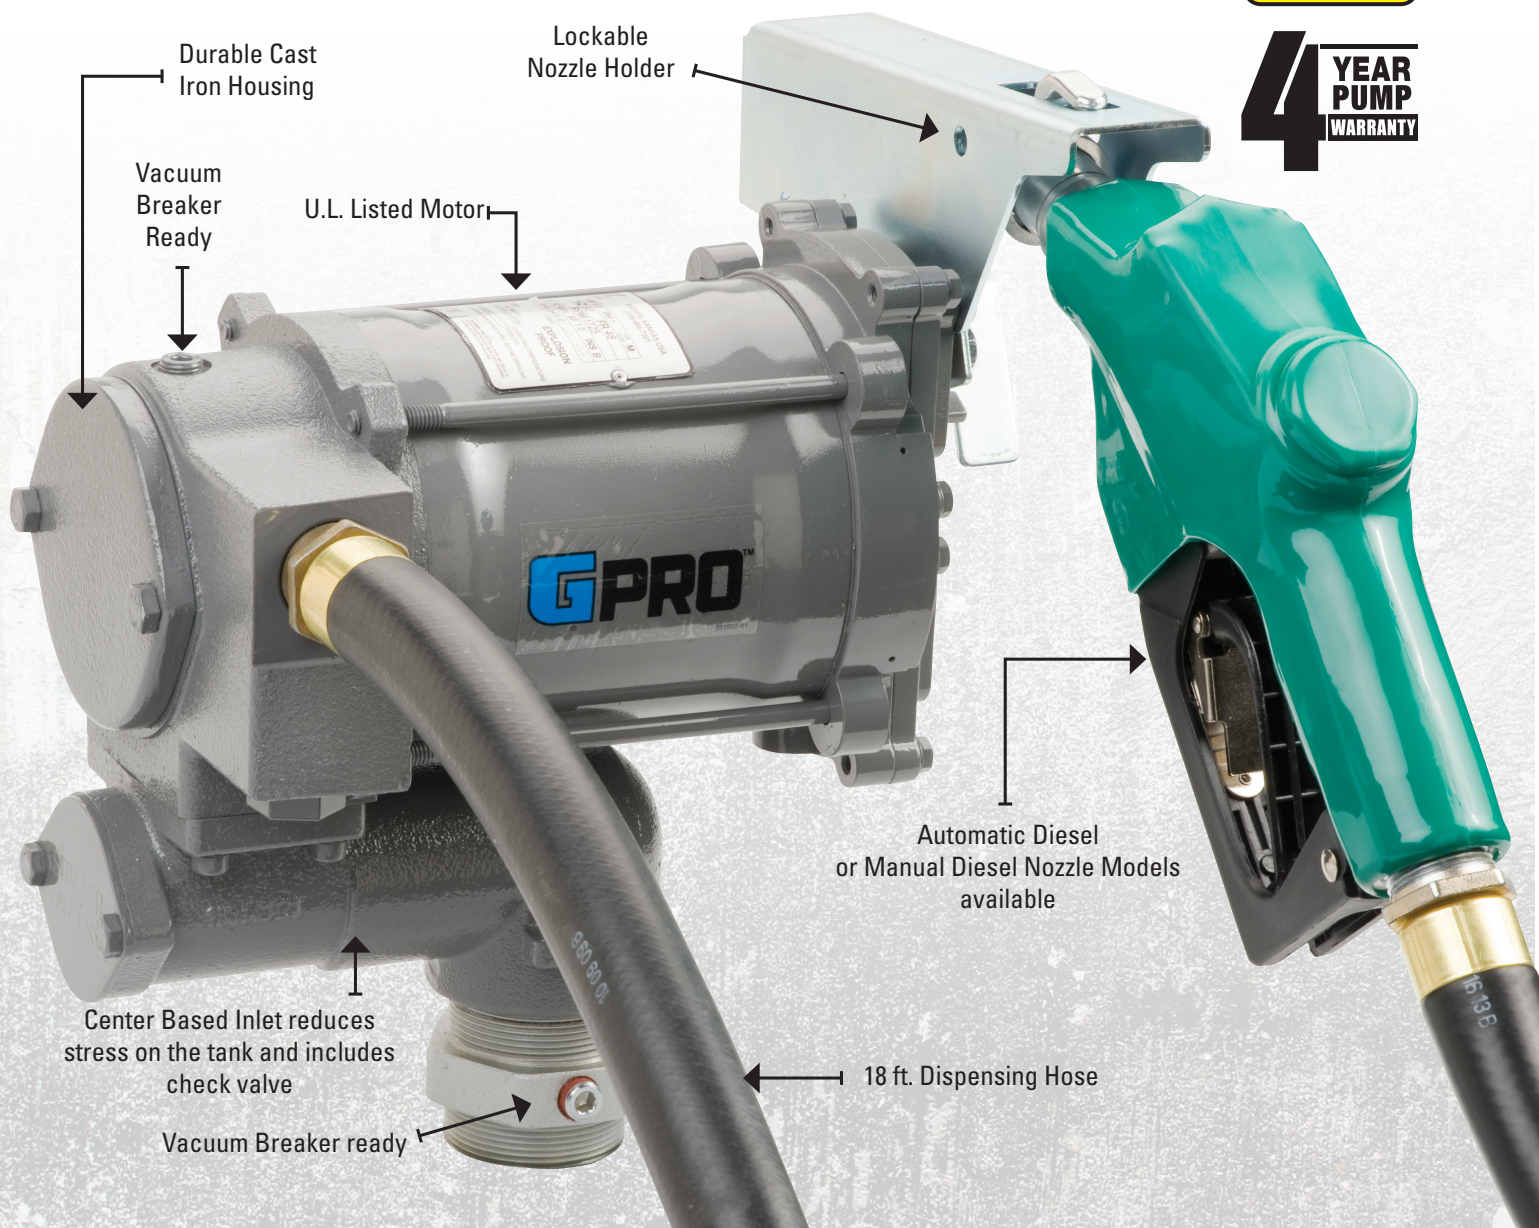

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Temperature Rating
PRO20-115AD	503000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO20-115MD	503000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO20-115RD	503000-04	None	None	-20° F / -29° C
PRO20-115PO	503000-01	None	None	-20° F / -29° C
PRO20-115AD/XTS	503000-06	Automatic Diesel	18 ft.	Tested to -40° F / -40° C
PRO20-115PO/XTS	503000-05	None	None	Tested to -40° F / -40° C