

VEHICLE FLEETS

CONSTRUCTION

AGRICULTURE



What can
25 GPM
do for
you?



- ▶ **Quick-Fit Modular**
Easily attach a filter, meter, or both
- ▶ **High Pressure Performance**
Ideal for use with a hose reel
- ▶ **Engineered to Deliver**
Featuring innovative product advancements and backed by an industry-leading 4-year warranty

NEXT GENERATION MODULAR VANE PUMP V25

Equipped with 

- 30-Minute, Auto Power Down with Easy Reset
- Pump 750 Gallons Uninterrupted
- Prevents Misuse


GPRO®

Eliminate dangerous leaks with flanged connections, O-rings, and meter mag drive

Add the Quick-Fit Modular Filter Kit

- Easy Installation
- The only tool needed is a hex key (included)
- **THREE options** to install the filter adapter

QUICK-FIT MODULAR

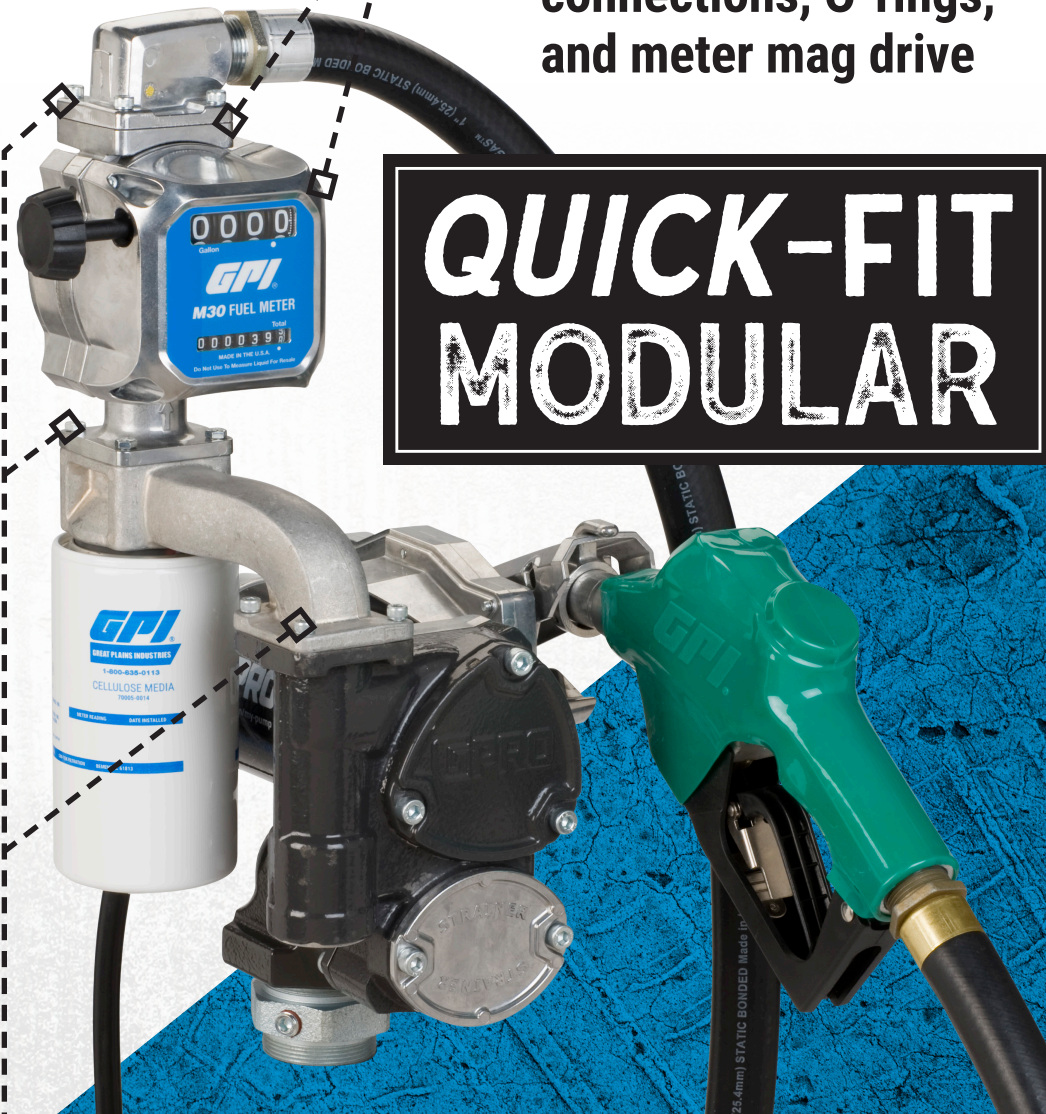

Four bolts and an O-ring - quickly attach a filter, meter, or both to customize your personal fuel station!

Quick-Fit Accessories Sold Separately

- Quick-Fit Filter Adapter Kit includes modular adapter and filter
- M30 Modular Fuel Meter is available in Gallons or Litres and 3/4 or 1 inch thread size


LOADED WITH FEATURES



Multi-Directional 90° Outlet

- Just four bolts and an O-ring for fast, leak-free installation of Quick-Fit Modular accessories

- Optional outlet fittings available to adapt to your application for a custom configuration

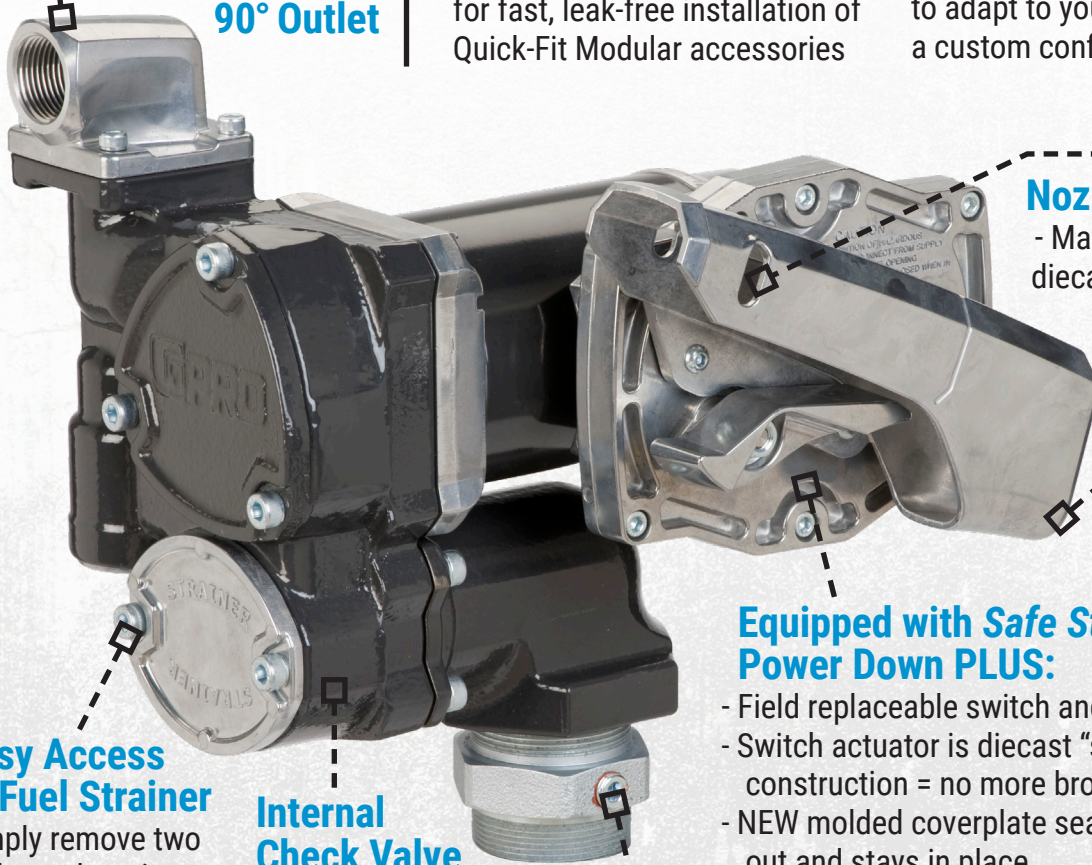

Lockable Nozzle Holder

- Made of durable diecast aluminum

NEW Drip Catch

- Helps keep tanks and trucks clean

Equipped with Safe Stop Power Down PLUS:

- Field replaceable switch and circuit breaker
- Switch actuator is diecast "solid" aluminum construction = no more broken switches
- NEW molded coverplate seal keeps moisture out and stays in place

Easy Access to Fuel Strainer

- Simply remove two bolts and strainer access cover

Internal Check Valve with "Perfect Prime"

- Keeps pump head primed and ready
- Reduces wear by avoiding dry prime conditions

Tank Adapter Included

- Easy Installation
- Ready for anti-siphon
- Vent kit sold separately

Automatic and Manual Nozzle Models - Feature a factory-installed power cord and include a telescoping suction pipe that adjusts from 15 in. to 40 in. (38.1 cm to 101.6 cm)



V25 MODELS / SPECIFICATIONS



**BUILT
to LAST**

Made with materials selected to prevent rust and survive all weather conditions:

- ▶ Diecast Aluminum
- ▶ Powder-Coated Cast Iron
- ▶ Powder-Coated Steel
- ▶ Molded Coverplate Seal

Superior components for long-lasting, trouble-free performance:

- ▶ Cast Iron Pump Head and Carbon Vanes
- ▶ All Metal Pump Drive Components

Built-in protection:

- ▶ Safe Stop - 30-Minute, Auto Power Down Prevents Misuse
- ▶ Internal Check Valve - Conserve Prime and Reduce Wear
- ▶ Circuit Breaker Motor Protection



**QUIET
OPERATION**

Quieter than the leading competitor's pump.

All Models

PERFORMANCE

Flow Rate: 25 GPM (94 L/min)

OPERATING PRESSURE

20 PSI (1.37 bar) - High Pressure

OPERATING TEMPERATURE

-20°F to 125°F (-29°C to 52°C)

MOTOR

2000 RPM, 4/10 HP,
UL Listed to US and Canadian Standards

MECHANICAL CONNECTIONS

Inlet / Outlet: 1 in. NPT

Mounting: 2 in. NPT

COMPATIBLE FLUIDS

Designed, tested and approved for use with gasoline blends (up to E15), diesel fuel blends (up to B20) and kerosene.

Pump Only Models

ADDITIONAL COMPATIBLE FLUIDS

In addition to the statement above, pump only versions support the use of aviation gasoline (AVGAS100LL) and kerosene grade (JET A).



Complete Pump Models

DISPENSING HOSE

18 ft. (5.5m) x 1 in.

SUCTION PIPE

1 in. NPT, Telescoping to 40 in. (101.6 cm)

FACTORY-INSTALLED POWER CORD

18 ft. (5.5m), 10/2 AWG*



12-Volt Models

ELECTRICAL

Input: 12V (dc) w/40 amp circuit breaker switch

Current Draw: 35 amp

Fuse: 40 amp

Part No.	Model	Nozzle
170000-03	V25-012AD	Automatic
170000-02	V25-012MD	Manual
170000-01	V25-012PX	None

Extreme Temperature Model

- Capable of operation in temperatures as low as -40°F (-40°C)

Part No.	Model	Nozzle
170000-05	V25-012PX+XT	None

24-Volt Models

ELECTRICAL

Input: 24V (dc) w/20 amp circuit breaker switch

Current Draw: 18 amp

Fuse: 20 amp

Part No.	Model	Nozzle
170001-03	V25-024AD	Automatic
170001-02	V25-024MD	Manual
170001-01	V25-024PX	None

