


Regulators

Die-cast zinc construction with stainless steel strainer and renewable brass seat. Diaphragm and disc are oil-resistant Buna-N. Secondary pressure side gauge connections are 1/4 in. NPT (f) and are sealed with removable pipe plugs. Maximum supply pressure is 300 psi (20,68 bar) for all sizes

listed. Operating range 0 to 250 psi (0 to 17,24 bar). Operating temperature range is 40 to 120 °F (4 to 49 °C).

Regulators

Model	Size	Dimensions				Dimensions				Weight	
		A		B		C		D		lbs.	kg
–	in.	in.	mm	in.	mm	in.	mm	in.	mm		
600004	1/4	3	76	6	152	1 3/8	35	2 3/8	60	1.8	0,8
600006	3/8	3	76	6	152	1 3/8	35	2 3/8	60	1.8	0,8
600008	1/2	3 9/16	90	7	178	1 1/2	38	3 1/4	83	2.8	1,3
600012	3/4	4 11/16	119	10	254	1 7/8	48	4 3/8	111	6.2	2,8
600016	1	4 11/16	119	10	254	1 7/8	48	4 3/8	111	6.2	2,8

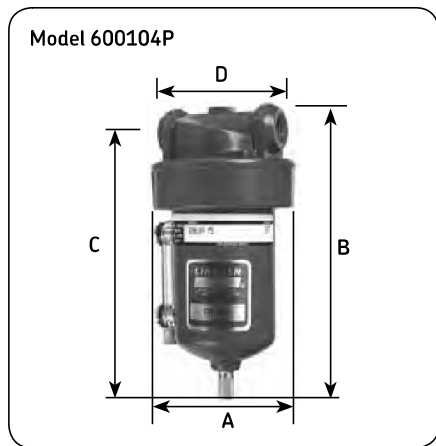

Filters

Constructed of die-cast zinc with 40 micron filter element of porous bronze. Metal bowl with sight glass. Maximum supply pressure 250 psi (17,24 bar). Maximum temperature 150 °F (66 °C).

Filters

Model	Size	Capacity size		Dimensions				Dimensions				Weight	
		oz.	cm3	A		B		C		D		lbs.	kg
–	in.			in.	mm	in.	mm	in.	mm	in.	mm		
600104P	1/4	5	142	2 15/16	75	5 5/8	143	5 1/8	130	2 13/16	71,4	1.8	0,8
600106P	3/8	5	142	2 15/16	75	5 5/8	143	5 1/8	130	2 13/16	71,4	1.8	0,8
600108P	1/2	8	227	3 3/4	95	6 1/4	159	5 5/8	143	2 13/16	71,4	2.8	1,3
600112	3/4	16	454	4 7/8	124	8 3/4	222	7 3/4	197	4 9/16	116	6.3	2,9
600116	1	16	454	4 7/8	124	8 3/4	222	7 3/4	197	4 9/16	116	6.3	2,9