

# T COMPLETE DEF TOTE KIT HREE 25



**EN.** Experience the latest innovation in fluid handling equipment with the Piusi Three25. Designed for maximum efficiency, it dispenses a 32.5% urea solution that is protected by the 3D DEF filter which removes contaminants and increases the lifetime of the catalyst.

This revolutionary DEF dispensing kit is easily attached onto the side of an IBC tote and locked in place with the new security lock bracket system. The pump is then connected to the tote via the Piusi DEF coupler (PDC) that keeps it secured with no leaks.

The Piusi Three25 comes with SB 325 automatic nozzle. This new technopolymer nozzle has a flexible shell that protects it from weathering and UV-radiation. Available with built-in electronic turbine meter for precise measurement right at your hands. Built standard with a break-away system, which detaches the spout if left in the tank when the vehicle departs.

Optimize your DEF transfer today with the Piusi Three25.

**ES.** La experiencia de la última innovación en equipos de manipulación de fluidos con el Piusi Three25. Diseñado para una máxima eficiencia, se dispensa una solución de urea 32,5% que está protegida por el filtro 3D DEF que elimina los contaminantes y aumenta la vida útil del catalizador.

Este kit de distribución DEF revolucionaria se une fácilmente en el lado de un tote de IBC y bloqueado en su lugar con el nuevo sistema de soporte de bloqueo de seguridad. La bomba se conecta a el tote a través del acoplador Piusi DEF (PDC) que lo mantiene asegurado sin fugas.

El Piusi Three25 viene con SB 325 boquilla automática. Esta nueva boquilla tecnopolímero tiene una cáscara flexible que protege de la intemperie y la radiación UV. Disponible con una función de medidor de turbina electrónico para correcta medición precisa en sus manos. Estándar Construido con un sistema de ruptura de distancia, que separa el pico si se deja en el tanque cuando el vehículo se aleja.


Optimizar su traslado de DEF hoy con el Piusi Three25.

**FR.** Découvrez la dernière innovation dans le matériel de manutention de fluide avec le Piusi Three25. Conçu pour une efficacité maximale, il distribue une solution d'urée de 32,5% qui est protégé par le filtre 3D DEF qui élimine les contaminants et augmente la durée de vie du catalyseur.

Ce kit DEF de distribution révolutionnaire se fixe facilement sur le côté d'un fourre-tout IBC et verrouillé en place avec le nouveau système de support de verrouillage de sécurité. La pompe est ensuite relié à l'épicerie, via le coupleur Piusi DEF (PDC) qui le maintient sécurisé sans fuites.

Le Piusi Three25 est livré avec SB 325 pistolet automatique. Cette nouvelle buse de techno a une coquille souple qui la protège contre les intempéries et les rayons UV. Disponible avec haut-compteur à turbine électronique pour droit de mesure précise de vos mains. Classique construit avec un système de sécessionniste, qui détache le bec si laissé dans le réservoir lorsque le véhicule quitte.

Optimisez votre transfert de DEF aujourd'hui avec le Piusi Three25.

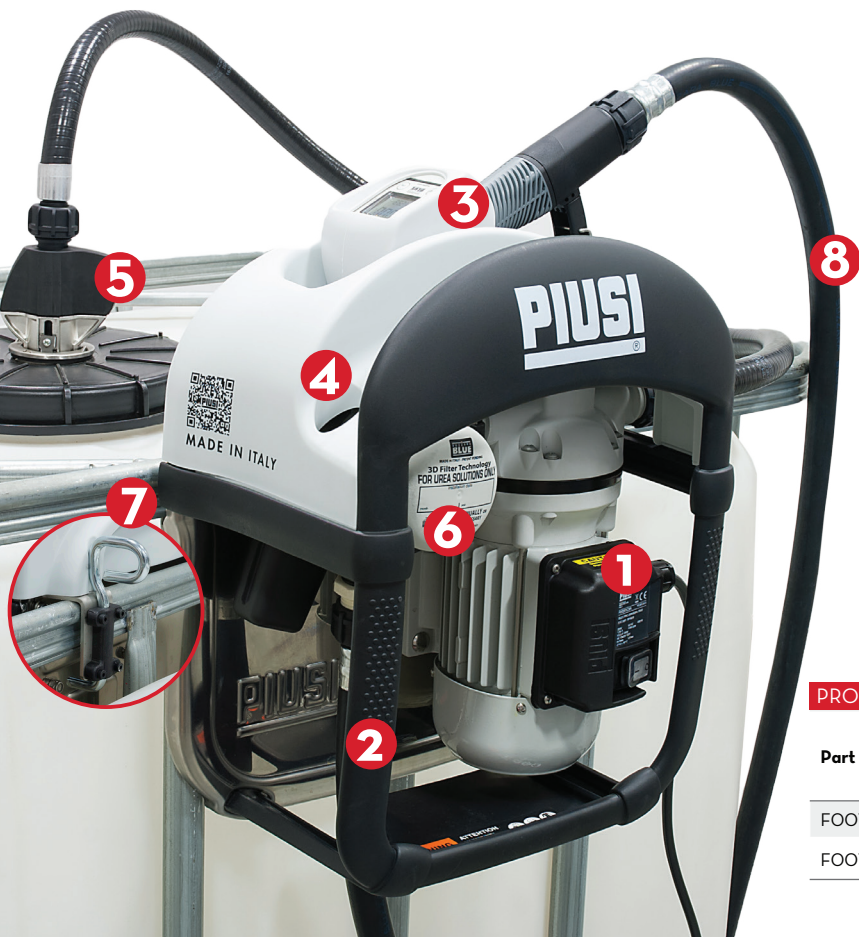

## FEATURES

- 1 SuzzaraBlue 12V or 120V Pump
- 2 Stainless steel plate with roll bar protection
- 3 SB 325/SB 325-metered automatic nozzle
- 4 High capacity hose holder and nozzle holder
- 5 Piusi DEF coupler (PDC)
- 6 3D DEF filter
- 7 New security lock bracket system
- 8 20 ft. Crimped EPDM delivery hose

\*Hose Interior Ø 3/4"

## PRODUCTS' RANGE WEIGHT AND PACKAGING

Part #	Weight		Packaging		
	kg	lbs	mm	in	pcs/box
FOO101A00	13.6	30	483x381x279	19x15x11	1
FOO101A10	13.6	30	483x381x279	19x15x11	1

# DEF DISPENSING KIT

OPTIONAL NOZZLES



SB 325 AUTOMATIC  
Part # F00617000



SB 325 METERED  
Part # F00617010

NOZZLE ADDITIONS

**SB 325 Nozzle can be equipped with Mis-Filling Spout Kit.**

This kit allows you to transform a standard SB 325 nozzle into an SB 325 mis-filling system by simply fitting a different spout onto the nozzle. This feature prevents you from having a mis-fill into the fuel tank by working in conjunction with the magnetic bypass adapter. The nozzle will not engage if not used in the allocated tank.

Magnetic Spout  
Bypass Adapter  
Part # F1840000



Magnetic  
Tank Adapter  
Part # F15165000



AVAILABLE ACCESSORIES

- K24 DEF flow meter  
Part # F00407340



PRODUCTS' RANGE TECHNICAL DATA

Part #	Description	Fluids type	Flow rate		Pressure		Voltage			rpm
			l/min	gpm	bar	psi	motor V/Hz	Power Watt	Amp. max.	
FO0101A00	Three25 120V	D	34	9	336	23.2	120V/60Hz	370	2	1700
FO0101A10	Three25 12V	D	34	9	336	23.2	12V DC	260	22	2800