

All Husky Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions and System Options

Whip Hoses

MODEL NO.	DESCRIPTION
2715	10" / 254 mm Coaxial Whip Hose
3360VR*-333	Reconnectable Safe-T-Break® connected to Model #2715 Coaxial Whip Hose

Guards

MODEL NO.	DESCRIPTION
3990*	Scuff Guard for 3360VR Safe-T-Break®
5895*	Scuff Guard for 5900 Safe-T-Break®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
7000	Safe-T-Break® Drain Cup

Color Chart


COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20

*Safe-T-Breaks® and Safe-T-Break® Scuff Guards are to be ordered with the corresponding guard color option added to the model number.


Example: If BLUE guards are desired, add guard color option -01 to the model number (4034-01).

For custom colors, a minimum order of 4,000 guards will be required.

Model 3360VR

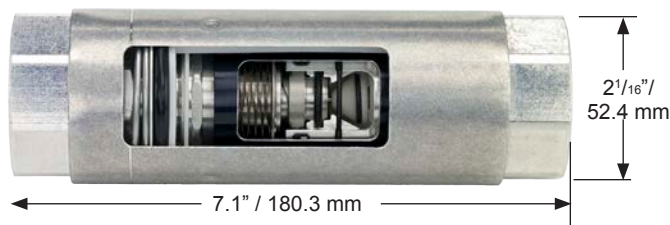

Model 5900

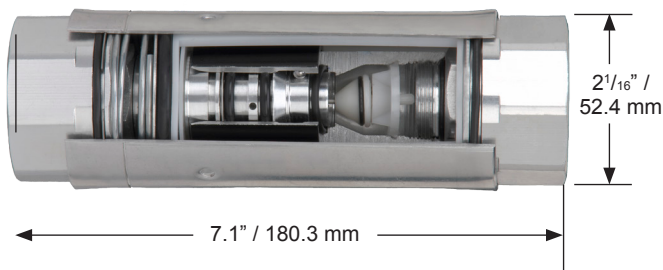

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

